

# Eme Wall Slim

*Lightweight Slabs / Ceramic Design*



Wall: DLENW 01 Soft Textured

**3 Colours / 1 Finish / 1 Size**

Eme Wall Slim is a highly versatile lightweight ceramic slab range for interior walls which utilises the ground-breaking Ductile® technology. Due to the high adaptability of the large-sized sheets, it is perfect for interior cladding. Easy to handle and fit thanks to its 6mm thickness.




Wall: DLENW 03 Soft Textured



DLENW 01




DLENW 02

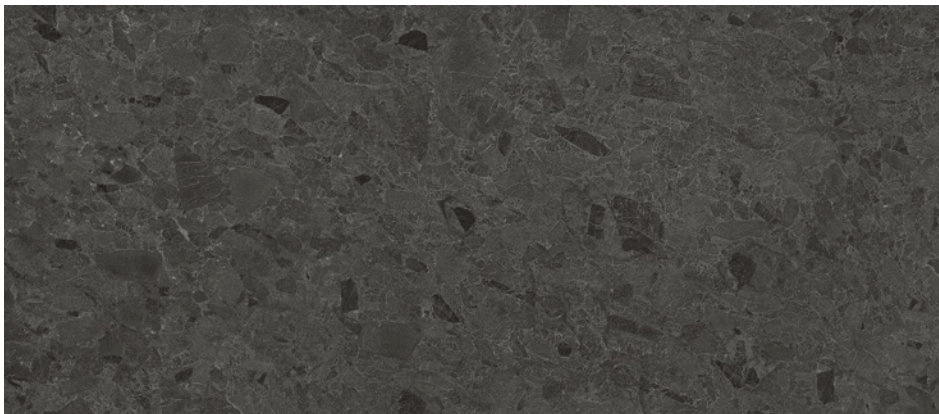

DLENW 03


# Sizes

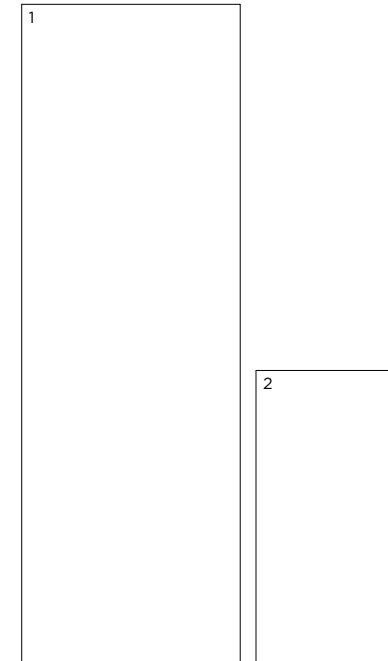


	Size (mm)	Thickness	Finish	Colour Availability
1	2698 x 898 (R)	6	Soft Textured	All colours
2	1198 x 598 (R)	6	Soft Textured	All colours

(R) Rectified size – squared edge with bevel. For use on internal walls only.  
Swatch colours may vary from original. Samples should be requested.

# Variations

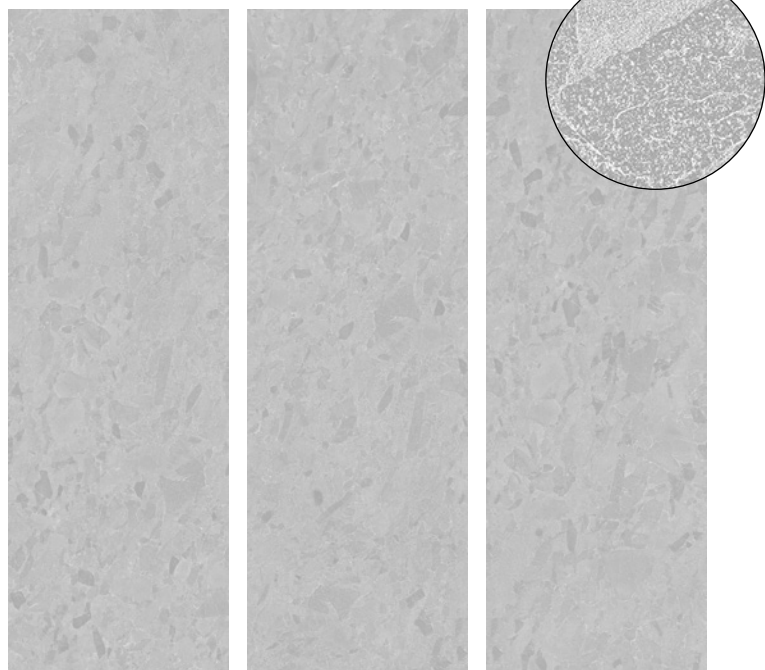


DLENW 01

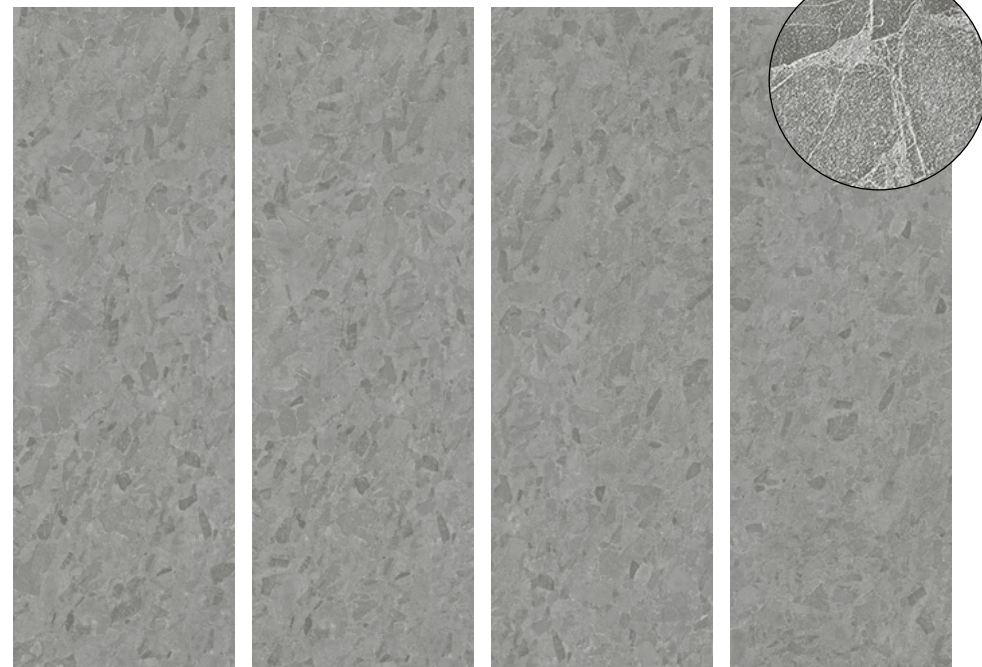

DLENW 02

898mm

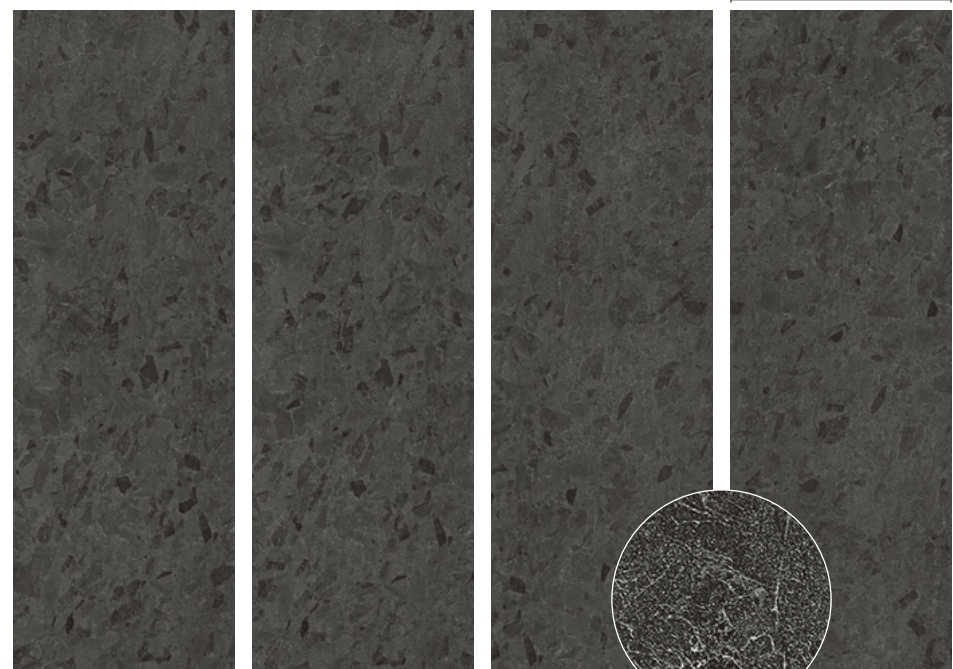

DLENW 03

2696mm

# Eme Wall Slim

Technical Data

**Product Type:** Glazed Ceramic (BS EN 14411 – Group BIII)

**Use:** Walls (Internal only)

**Product Code:** DLENW

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	> 10%
Modulus of rupture (bending strength)	BS EN ISO 10545-4	< 7.5mm thick ≥ 15 N/mm <sup>2</sup>	> 20 N/mm <sup>2</sup>
Breaking strength	BS EN ISO 10545-4	< 7.5mm thick ≥ 200 N	> 400 N
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			30%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. February 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com