

# Black & White Marble

*Porcelain Marble*



**8 Colours / 2 Finishes / 3 Sizes / 2 Mosaics**

Inspired by the different morphologies formed by the visceral movement of the earth, Black & White Marble embraces and explores the concept of the absence of light by presenting a chromatic gradient based on white and black in a multi-faceted graphic proposal that joins the two monochromatic surfaces.








Wall & Floor: DFBW 07 High Glossy



Floor: DFBW 08 Natural




DFBW 01

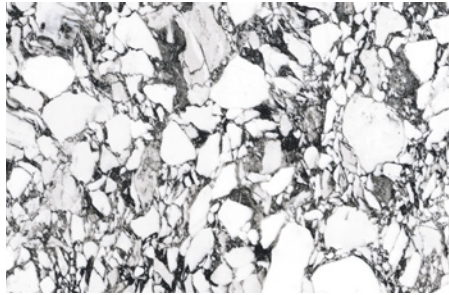


DFBW 06




DFBW 03

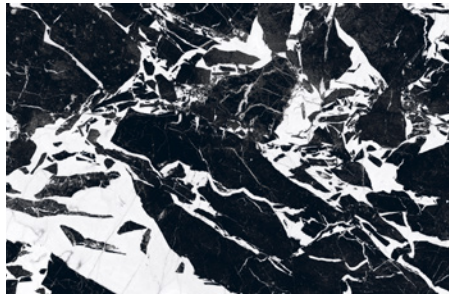


DFBW 07

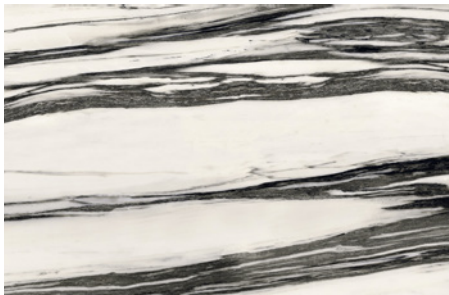


DFBW 05

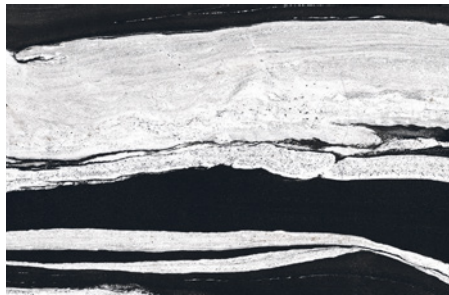

DFBW 08

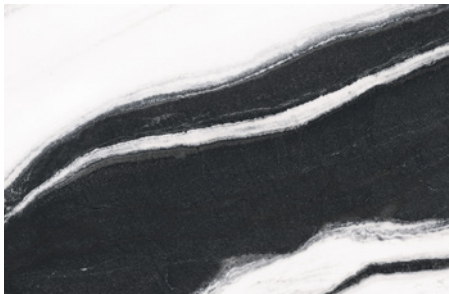


DFBW 04

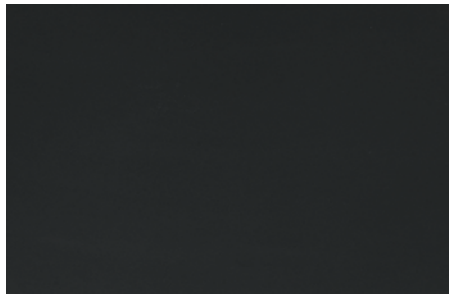


DFBW 02

# Sizes

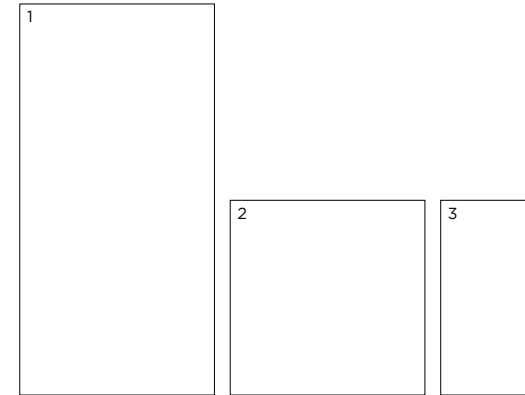

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Natural High Glossy	All colours All colours
2	597 x 597 (R)	9	Natural High Glossy	DFBW 01, 02, 03, 04 & 07 DFBW 01, 02, 03, 04 & 07
3	597 x 297 (R)	9	Natural High Glossy	DFBW 01, 02, 03, 04 & 07 DFBW 01, 02, 03, 04 & 07

(R) Rectified size - square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.






# Mosaics & Special Pieces

## Mosaic




DFBW 01




DFBW 03




DFBW 05



DFBW 04




DFBW 06



DFBW 08




DFBW 07



DFBW 02


## Listello Sfalsato




DFBW 01



DFBW 03





DFBW 05



DFBW 07




DFBW 02

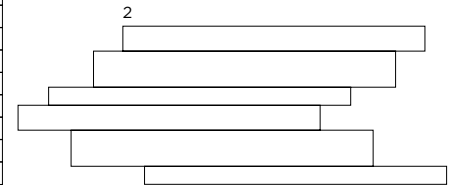

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 27 x 27 on 297 x 297 sheet	9	Natural High Glossy	All colours All colours
2	Listello Sfalsato on 397 x 210 sheet	9	Natural High Glossy	DFBW 01, 02, 03, 05 & 07 DFBW 01, 02, 03, 05 & 07
	Plinth Skirting 597 x 46	9	Natural High Glossy	All colours All colours
	Bullnose Step Tread 1197 x 330 x 30	9	Natural	All colours
	Angle Step Tread 1197 x 330 x 30	9	Natural	All colours

Swatch colours may vary from original. Samples should be requested.




V1 Low - V3 High  
Shade Variation


**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


# V3 - High Shade Variation

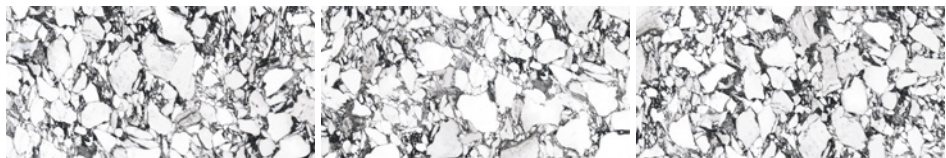


DFBW 06 Natural

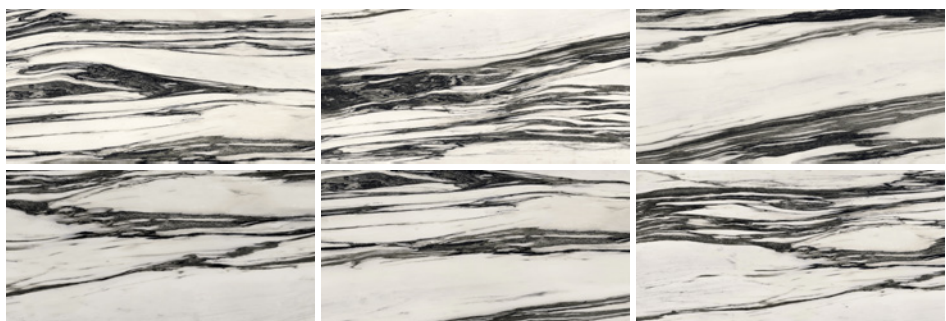


DFBW 05 High Glossy

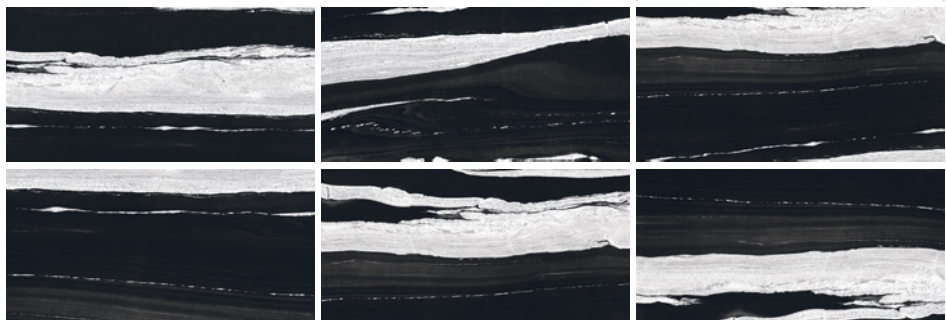


DFBW 08 Natural

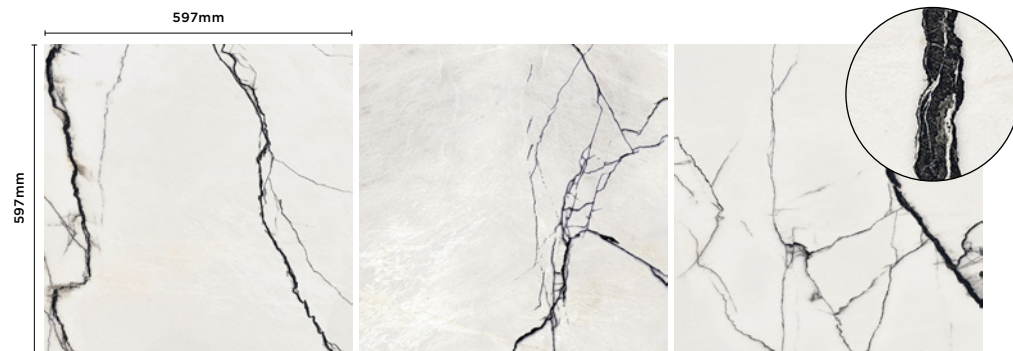

DFBW 03 High Glossy

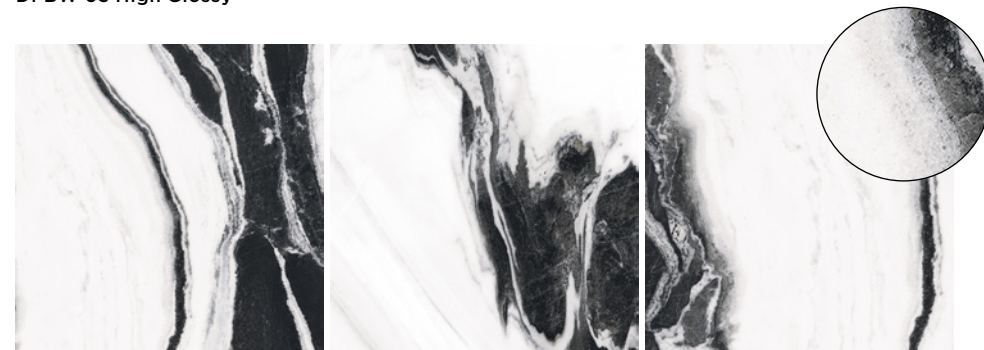

DFBW 04 Natural

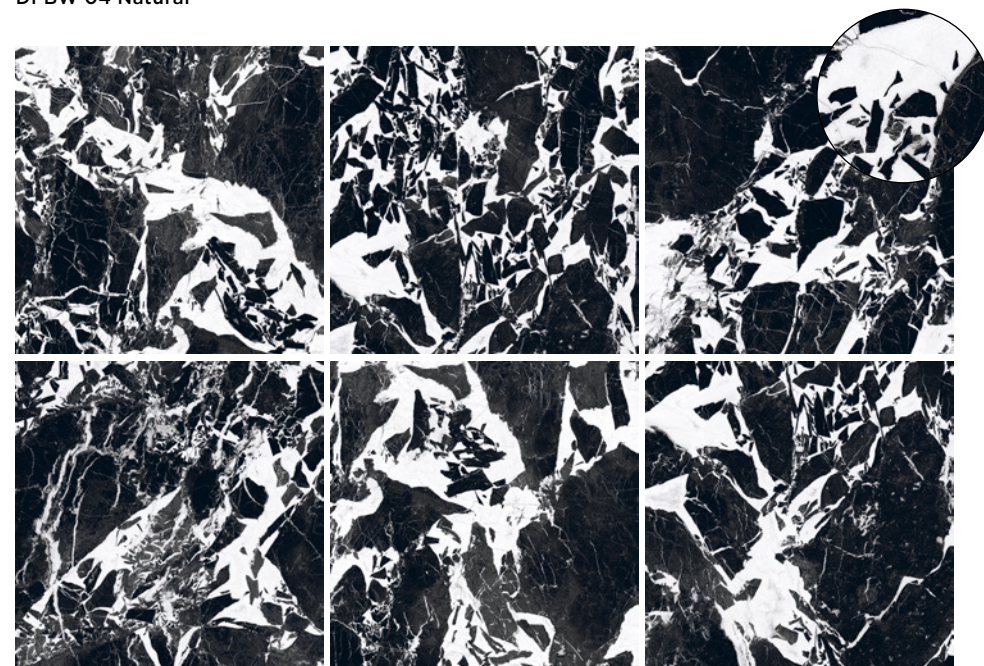

DFBW 07 High Glossy

# Black & White Marble

## Technical Data

**Product Type:** Unglazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DFBW

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.35%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Natural
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	50 N/mm <sup>2</sup> (average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	3200 N (average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm <sup>3</sup>	140 mm <sup>3</sup> (average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA-ULB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4 – High Glossy Class 5 – Natural
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			DFBW 01 & 06 – 0% ALL OTHER COLOURS – 20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com