

# Pastel

*Ceramic Design*



Wall: DWPL 05 Bevelled Gloss

**6 Colours / 1 Finish / 1 Size / 2 Formats**

Pastel is a range of ceramic wall tiles specially developed to portray a mix of high and low relief areas through the two formats — flat and bevelled. The shiny and translucent gloss finish enhances the glaze and helps create a multitude of innovative layout options.



Left Wall: DWPL 03 Flat Gloss  
Right Wall: DWPL 01 Flat Gloss



Wall: DWPL 01 Flat, DWPL 03, 04 & 06 Bevelled Gloss



Wall: DWPL 01, 02, 03 & 04 Flat Gloss

# Sizes



DWPL 01 Flat




DWPL 01 Bevelled



DWPL 02 Flat



DWPL 02 Bevelled

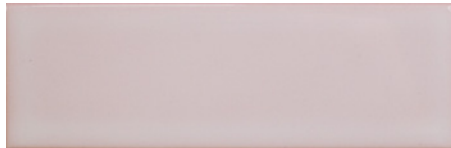

DWPL 03 Flat



DWPL 03 Bevelled



DWPL 04 Flat



DWPL 04 Bevelled




DWPL 05 Flat



DWPL 05 Bevelled



DWPL 06 Flat

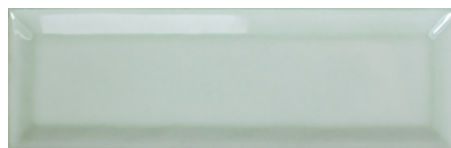


DWPL 06 Bevelled

Flat




Bevelled

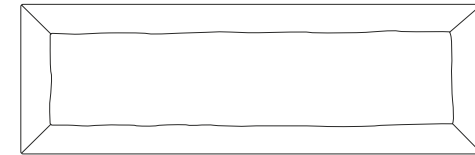

	Size (mm)	Thickness	Finish	Colour Availability
1	Flat 160 x 52 (N)	8.5	Gloss	All colours
	Bevelled 160 x 52 (N)	11	Gloss	All colours
	Rounded Edge 160 x 11	8.5	Gloss	All colours

(N) Nominal size - pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested.



# Pastel

## Technical Data

**Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)**

**Use: Walls (Internal only)**

**Product Code: DWPL**

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤ N < 150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 12 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 600 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	< 7 x 10 <sup>-6</sup> / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes		A1
Recycled content			62%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. December 2021

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com