

Black & White Marble Magnum

Lightweight Slabs / Porcelain Marble




3 Colours / 2 Finishes / 5 Sizes / 3 Mosaics / 1 Décor

Inspired by the different morphologies formed by the visceral movement of the earth, Black & White Marble Magnum embraces and explores the concept of the absence of light by presenting a chromatic gradient based on white and black in a multi-faceted graphic proposal that joins the two monochromatic surfaces.






DMAG 70

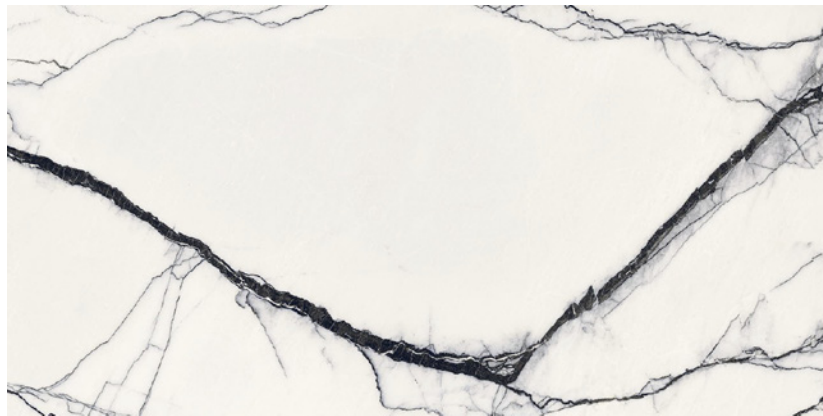


DMAG 127

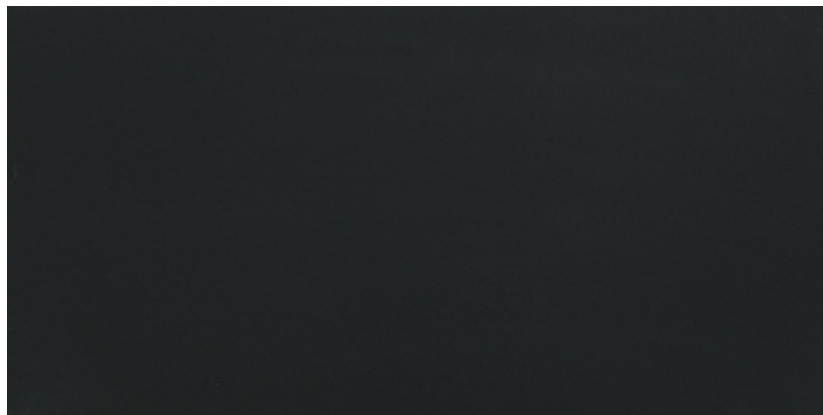


DMAG 71

Sizes

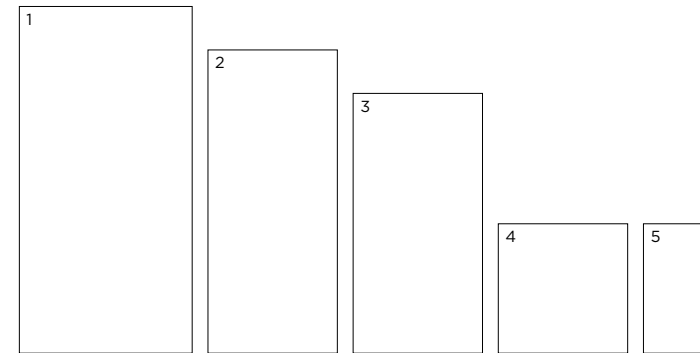

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|-----------------|-----------|------------------------|----------------------------|
| 1 | 3197 x 1597 (R) | 6 | Natural High Glossy | All colours All colours |
| 2 | 2797 x 1197 (R) | 6 | Natural High Glossy | All colours All colours |
| 3 | 2397 x 1197 (R) | 6 | Natural High Glossy | All colours All colours |
| 4 | 1197 x 1197 (R) | 6 | Natural High Glossy | All colours All colours |
| 5 | 1197 x 597 (R) | 6 | Natural High Glossy | All colours All colours |

(R) Rectified size - square edge with bevel. Mosaics, décors and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.



V1 Low - V3 High
Shade Variation

DOMUS


service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaics, Décors & Special Pieces


Mosaic 72 x 72mm



DMAG 70



DMAG 127



DMAG 71

Muretto Mosaic



DMAG 70




DMAG 127




DMAG 71

Mosaic 27 x 12mm




DMAG 70



DMAG 71




DMAG Black & White Décor

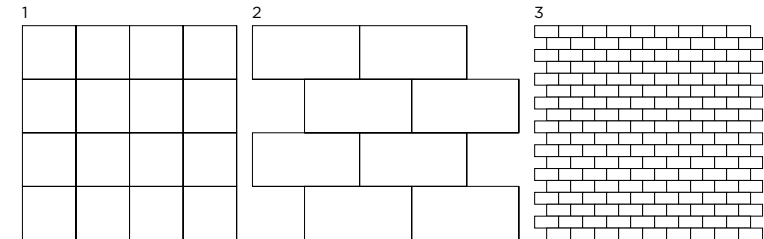

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|-----------------------------------------------|-----------|------------------------|----------------------------|
| 1 | Mosaic 72 x 72 on 297 x 297 sheet | 6 | Natural High Glossy | All colours All colours |
| 2 | Muretto Mosaic 147 x 72 on 297 x 297 sheet | 6 | Natural High Glossy | All colours All colours |
| 3 | Mosaic 27 x 12 on 297 x 297 sheet | 6 | Natural High Glossy | All colours All colours |
| | Black & White Décor 1197 x 597 x 6mm (R) | 6 | Natural | As shown |
| | Plinth Skirting 597 x 46 | 6 | Natural High Glossy | All colours All colours |


(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.




DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


V3 - High Shade Variation

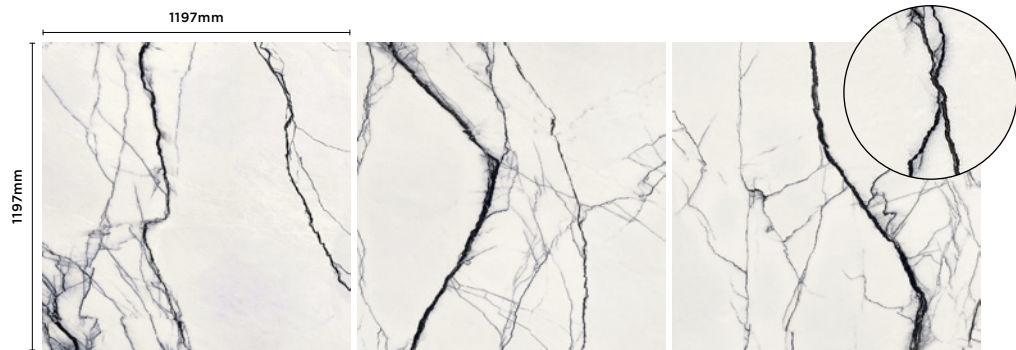

DMAG 127 High Glossy

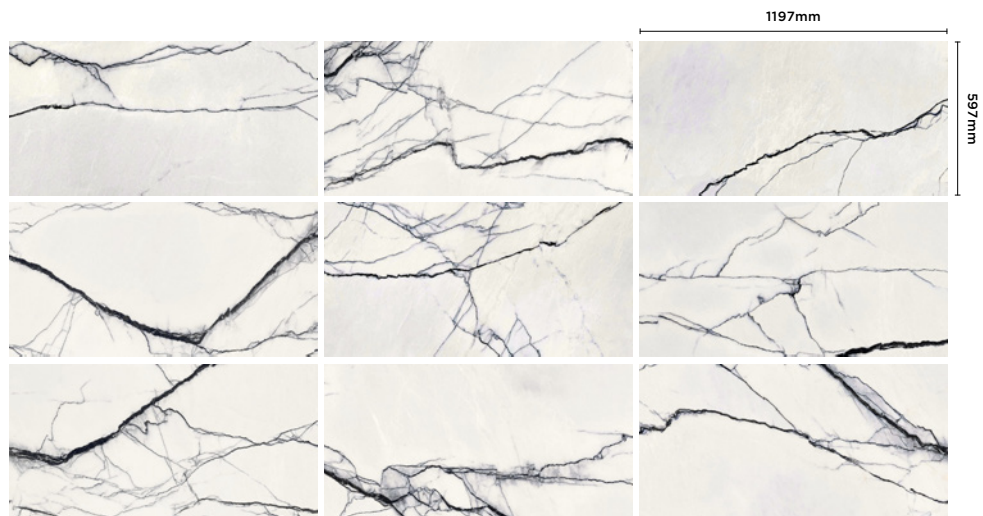

DMAG 127 Natural

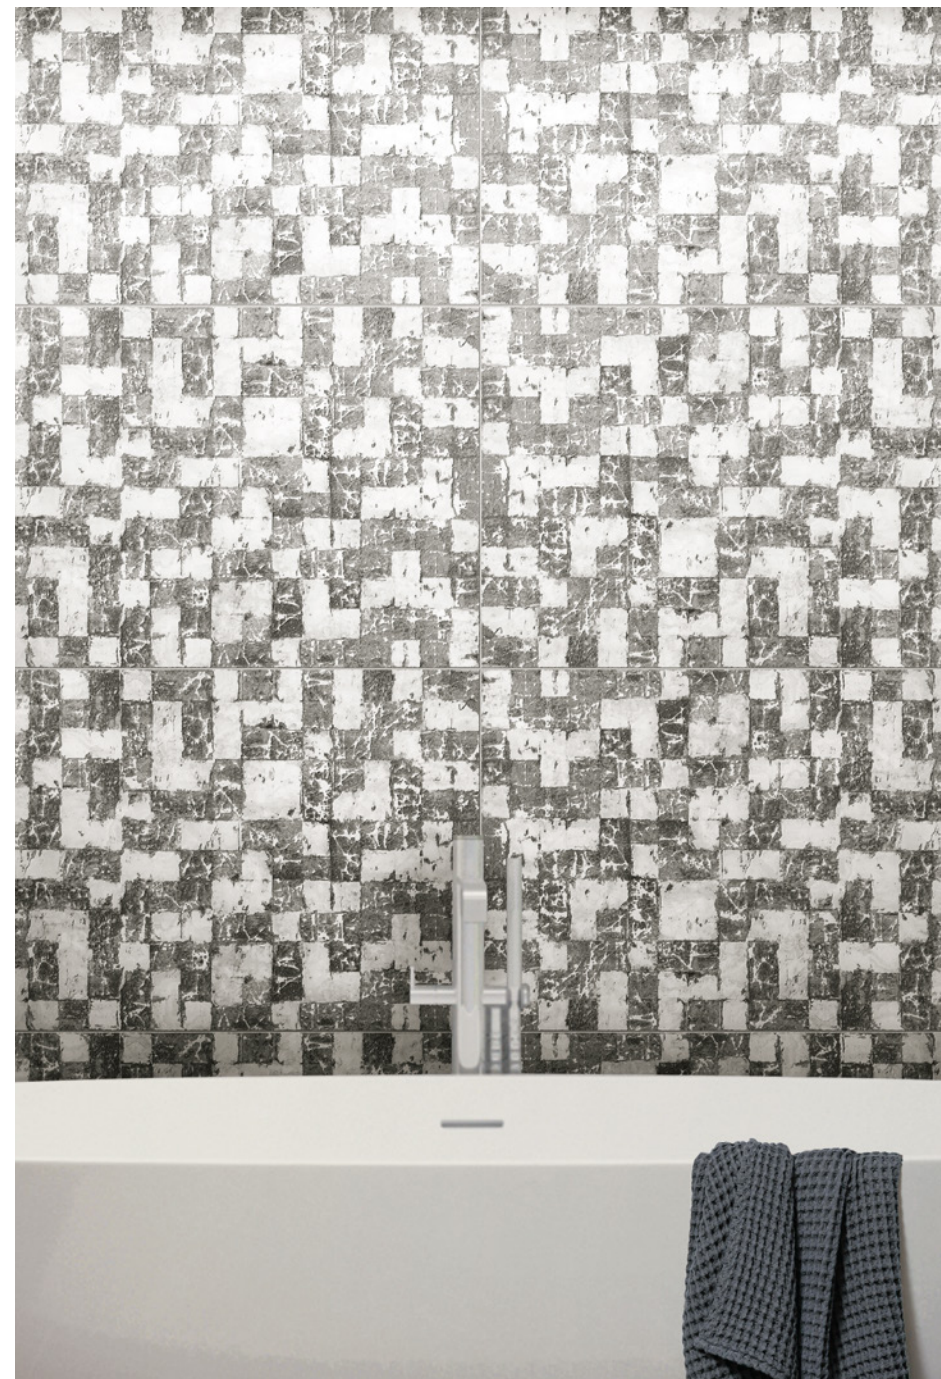

Wall: DMAG Black & White Décor Natural

Black & White Marble Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width | BS EN ISO 10545-2 | ± 0.60% (max. ± 2.0mm) | ± 0.15% |
| Thickness | BS EN ISO 10545-2 | ± 5% (max. ± 0.5mm) | ± 5% |
| Edge straightness | BS EN ISO 10545-2 | ± 0.50% (max. ± 1.5mm) | ± 0.1% |
| Orthogonality (squareness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | ± 0.2% |
| Planarity (flatness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | ± 0.2% |
| Appearance | BS EN ISO 10545-2 | > 95% | Conforms |

SLIP RESISTANCE

| Technical Characteristics | Industry Standards | Requirement | Finish |
|--------------------------------------------|--------------------------------|---------------------------|---------|
| Areas with footwear | BS EN ISO 10545-17 (DIN 51130) | R9 from 3° to 10° | Natural |
| Slip resistance Coefficient of friction | BS 7976-2 BS EN 16165 | Test results upon request | |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|---------------------------------------------------------------|-------------------------------------------------------|------------------------|--------------------------------------------|
| Water absorption | BS EN ISO 10545-3 | ≤ 0.5% | 0.08% (average value) |
| Modulus of rupture (bending strength) | BS EN ISO 10545-4 | ≥ 35 N/mm ² | 52 N/mm ² (average value) |
| Breaking strength | BS EN ISO 10545-4 | ≥ 700 N | 1350 N (average value) |
| Resistance to deep abrasion (unglazed tiles) | BS EN ISO 10545-6 | ≤ 175 mm ³ | 140 mm ³ (average value) |
| Thermal shock resistance | BS EN ISO 10545-9 | No visible defects | Resistant |
| Frost resistance | BS EN ISO 10545-12 | No surface alteration | Resistant |
| Chemical resistance: Low concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | ULA-ULB |
| Domestic chemicals & additives for swimming pools | BS EN ISO 10545-13 | UB min. | UA |
| Stain resistance | BS EN ISO 10545-14 | Declared value | Class 4 – High Glossy Class 5 – Natural |
| Reaction to fire | Based on the decision 96/603/EC and its changes | A1 _{FL} /A1 | A1 _{FL} /A1 |
| Recycled content | | | DMAG 71 – 20.5% All other colours – 0% |



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com