Robur Fundamental 180


Engineered Wood



7 Colours / 2 Finishes / 1 Size

Robur Fundamental 180 is a range of PEFC-certified, 12mm-thick, engineered European oak in a 180mmwide plank format. It is forested and produced to exacting and responsible standards. Refer to Robur 180 and Robur 240 for alternative plank formats and Robur Parquet for strip/herringbone formats.



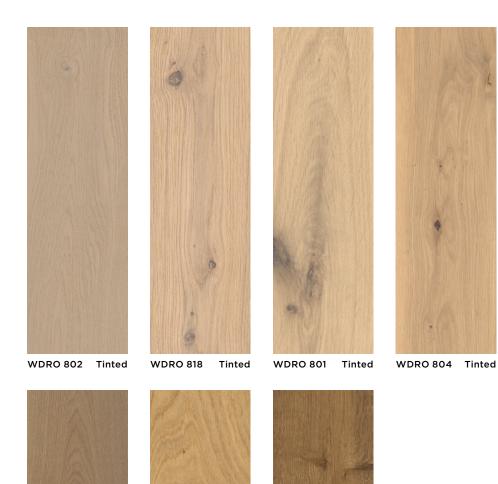



service@domuswood.com | t: 020 8481 9500 | domuswood.com

Product Data

Engineered Wood

1 Plank Format

180 x 2200 x 12mm

Material:	European Oak (Quercus robur)	Certification:	PEFC
Finishes:	Matt UV Lacquer (WDRO 801, 802, 804 & 805)	Grade:	Accent
	Natural Oil (WDRO 816, 818 & 820)		
Brushing:	Brushed (WDRO 801, 802, 804, 805, 818 & 820)		
	Heavy Brushed (WDRO 816)		
Treatments:	Natural (WDRO 805)		
	Fumed (WDRO 816)		
	Tinted (WDRO 801, 802, 804, 818 & 820)		
Construction:	12mm (9.5mm engineered spruce base with 2.5mm oak s	surface layer)	
	2-way micro beyel 56™ qlueless click joint system		

PEFC/16-37-2066 Promoting Sustainable Forest Management

www.pefc.co.uk

	2-way micro bevel. 5G™ glueless click joint system	
Application:	Internal use only. Suitable with underfloor heating	
Installation:	Recommended to be floated or fully bonded	



latural WDRO 816 Fumed

WDRO 805 Natural

Technical Data

Engineered Wood

Cleaning & Maintenance Specification: ETC&M 03 (WDRO 816, 818 & 820) ETC&M 01 (all other colours)

PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Reaction to Fire	UNI EN 14342 EN 13501-1	Cfl-S1
Formaldehyde Emission	UNI EN 14342 EN 717-1	E1 (≤ 0.05ppm)
VOC Emissions	AgBB-Scheme Blue Angel	≤ 300ppm
Bond Strength	DIN EN 204	≥ D3
Thermal Resistance	UNI EN 14342	0.102m ² k/W

NB: Compatible with underfloor heating systems - subject to K21 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, 21 March 2024 9:46 am





service@domuswood.com | t: 020 8481 9500 | domuswood.com



Floor: WDRO 805 Matt UV Lacquer

Overview Images

Robur Fundamental 180



WDRO 805 Matt UV Lacquer



WDRO 816 Natural Oil



WDRO 820 Natural Oil



WDRO 802 Matt UV Lacquer



WDRO 818 Natural Oil



WDRO 801 Matt UV Lacquer



WDRO 804 Matt UV Lacquer