

Le Gers 20mm

External 20mm / Porcelain Stone



3 Colours / **1** Finish / **3** Sizes

Inspired by reclaimed limestones used in historical châteaux and churches in the ancient regions of Southern France, Le Gers 20mm is a porcelain tile range suitable for external use. The warm and soft colours of these stone-effect tiles evoke cosy and prestigious atmospheres giving spaces a strong and fancy character.





DXF SLE 01




DXF SLE 02



DXF SLE 03

Sizes

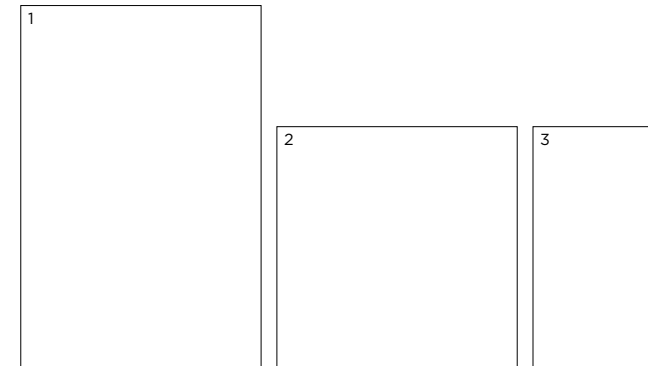

	Size (mm)	Thickness	Finish	Colour Availability
1	894 x 595 (R)	20	Anti-Slip	All colours
2	595 x 595 (R)	20	Anti-Slip	All colours
3	595 x 296 (R)	20	Anti-Slip	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.




Floor: DXF SLE 02 Anti-Slip

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Swimming Pool Border 894 x 330 (R)	20	Anti-Slip	All colours
2	Swimming Pool Border 595 x 330 (R)	20	Anti-Slip	All colours
3	Bullnose L-Shape Step Tread 894 x 330 (R)	20	Anti-Slip	All colours
4	Bullnose L-Shape Step Tread 595 x 330 (R)	20	Anti-Slip	All colours
5	Grid 595 x 145 (R)	20	Anti-Slip	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.



V3 - High
Shade Variation

DOMUS

Le Gers 20mm

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors

Product Code: DXF SLE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R11 from 19° to 27°	Anti-Slip
Areas with bare feet	DIN 51097	B over 18° to 24°	Anti-Slip
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 50 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	13 600 N (typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ MK-1
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance:			
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 - glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	
Recycled content			> 40%

*PEI classifications
 PEI 1 - Very light traffic
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com