

Gubi Wall

Ceramic Design



4 Colours / 3 Patterns / 1 Finish / 1 Size


In a soft, industrial palette, Gubi Wall provides surface detailing with a minimalist aesthetic. Three distinct surface relief designs: Calm, Prints and Peak, each with a striking textural pattern making it perfect for feature walls.



Sizes



DLGW 01 Calm

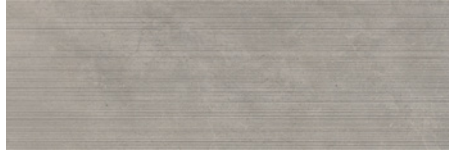


DLGW 02 Calm




DLGW 01 Prints



DLGW 02 Prints

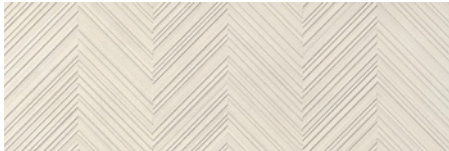

DLGW 01 Peak

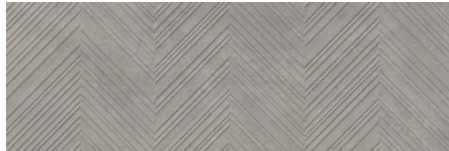

DLGW 02 Peak



DLGW 03 Calm




DLGW 04 Calm




DLGW 03 Prints




DLGW 04 Prints

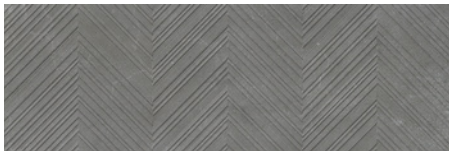

DLGW 03 Peak

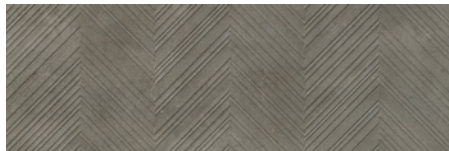


DLGW 04 Peak



	Size (mm)	Thickness	Finish	Pattern	Colour Availability
1	898 x 298 (R)	9	Natural	Calm Prints Peak	All colours All colours All colours

(R) Rectified size - squared edge with bevel. Suitable for use on internal walls only.
Swatch colours may vary from original. Samples should be requested.



Gubi Wall

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DLGW

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 12 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 600 N	Conforms
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			45%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

July 2019



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com