

Matieres

Porcelain Metal



Floor: DRMT 06 Matt

6 Colours / 2 Finishes / 5 Sizes / 3 Mosaics

With a modern industrial aesthetic, Matieres features brushed metal-effect markings and high tonal variation. Available with matching mosaics, perfect for feature areas. View Matieres Magnum for coordinating 6mm-thick lightweight slabs.



Floor (Outside): Matieres 20mm DXF RMD 02 Structured
Floor (Inside): DRMT 02 Matt



Floor: DRMT 05 Matt



Shower Wall & Floor: DRMT 01 Mosaic Matt
Wall & Floor: DRMT 01 Matt



DRMT 01



DRMT 02



DRMT 03



DRMT 04




DRMT 05



DRMT 06

Sizes

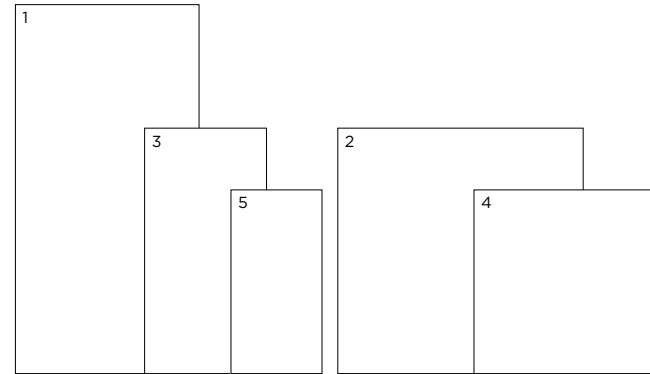

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Matt	All colours
2	797 x 797 (R)	9	Matt	All colours
3	797 x 397 (R)	9	Matt Structured	All colours All colours
4	597 x 597 (R)	9	Matt	All colours
5	597 x 297 (R)	9	Matt	All colours

(R) Rectified size – square edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

Mosaics & Special Pieces



DRMT 01 Mosaic



DRMT 02 Mosaic



DRMT 03 Mosaic



DRMT 04 Mosaic



DRMT 05 Mosaic



DRMT 06 Mosaic




DRMT 01 Listello Sfalsato




DRMT 02 Listello Sfalsato



DRMT 03 Listello Sfalsato





DRMT 04 Listello Sfalsato



DRMT 05 Listello Sfalsato




DRMT 06 Listello Sfalsato

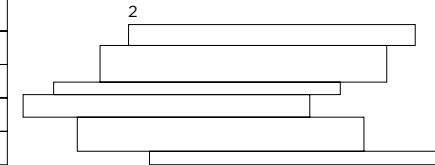

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 47 x 47 on 297 x 297 sheet	9	Matt	All colours
2	Listello Sfalsato on 397 x 210 sheet	9	Matt	All colours
	3D Muretto 27 x 27 on 297 x 297 sheet	9	Matt	All colours
	Step Tread 1200 x 330 x 30	9	Matt	All colours
	Angle Step Tread 1200 x 330 x 30	9	Matt	All colours
	Plinth Skirting 597 x 46	9	Matt	All colours
	Elemento A Elle 297 x 147 x 27	9	Matt	All colours

Swatch colours may vary from original. Samples should be requested.



Matieres

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DRMT

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Matt Structured
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Matt Structured
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (average values)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com